


Quality Concrete Sanitary,
Water & Drainage Products
with Dependable Service

Knight's
PRECAST
480 Hodge Road, Summerville, SC 29483, (843)873-3011

72"Ø SPECS

SPECIFICATIONS:

1. 4,000 PSI CONCRETE
2. WALL THICKNESS= 7" REINFORCED TO MEET ASTM C-478
3. BASESLAB THICKNESS= 8" REINF W/#5 GRADE 60 REBAR @ 6"O.C.E.W.
EXTENDED BASESLAB HAS 6" EXTENSION
4. TOPSLAB THICKNESS= 10" (13" LAY-LENGTH), REINF. W/#5 GRADE 60 REBAR @ 9"O.C.E.W.
5. INTERIOR and/or EXTERIOR COATED WHEN NEGOTIATED.
6. MANHOLE STEPS GENERALLY NOT REQUIRED IN WETWELLS.
7. DRAWING SCALE = N.T.S

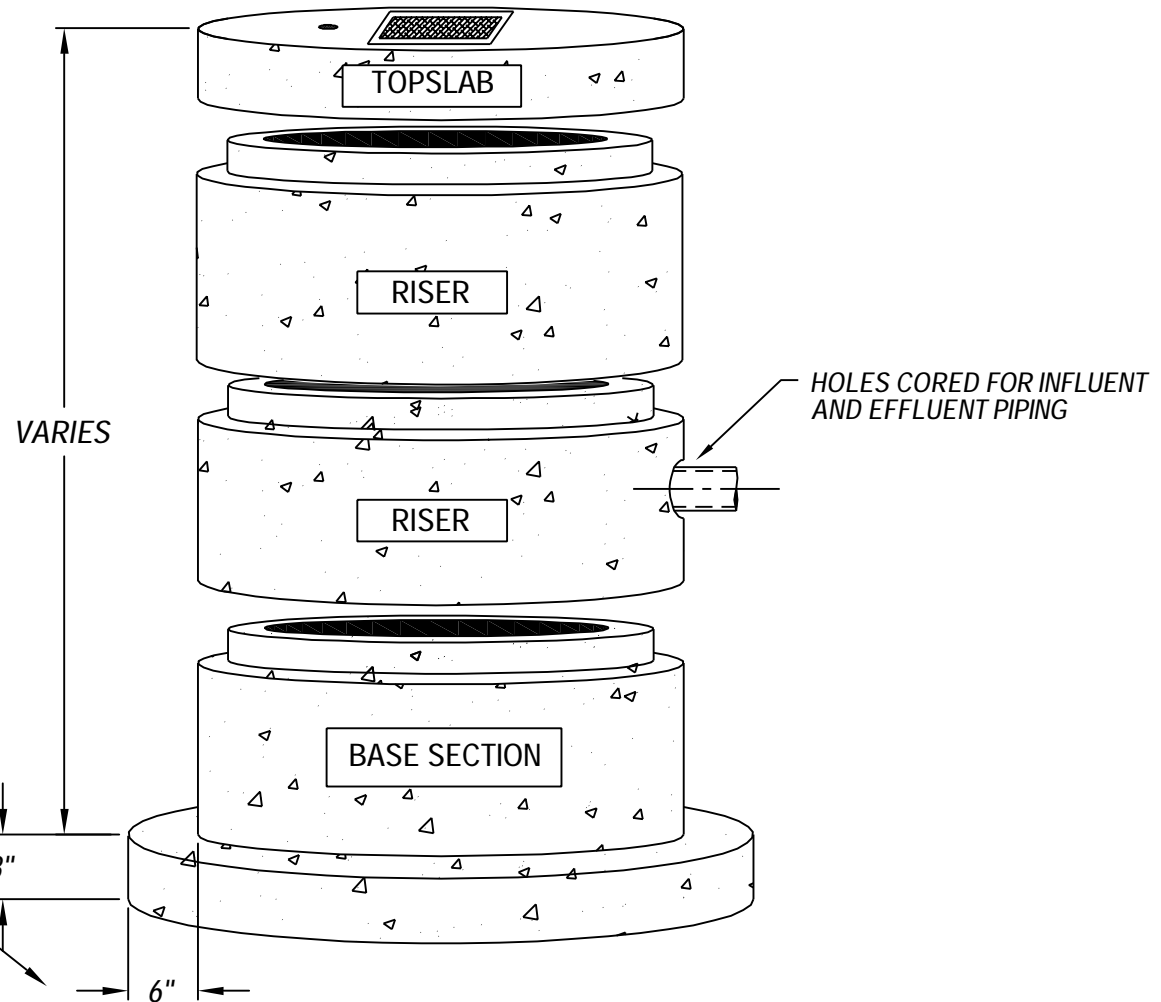

NOTE: BASESLAB THICKNESS
AND EXTENSIONS MAY VARY,
PER JOB SPECS.