

Quality Concrete Sanitary,
Water & Drainage Products
with Dependable Service




818 Central Avenue, Summerville, SC 29483, (843)873-3011

96" Ø SPECS

SPECIFICATIONS:

1. 4,000 PSI CONCRETE
2. WALL THICKNESS=9" REINFORCED TO MEET ASTM C-478
3. BASESLAB= 8" THICK x 13" EXTENDED, REINFORCED w/#5 GRADE 60 REBAR @ 6"O.C.E.W.
4. TOPSLAB THICKNESS=10", (13" LAY-LENGTH), REINF. w/#6 GRADE 60 REBAR @ 6"O.C.E.W.
5. INTERIOR and/or EXTERIOR COATED WHEN SPECIFIED
6. MANHOLE STEPS GENERALLY NOT REQUIRED IN WETWELLS.
7. DRAWING'S SCALE = N.T.S

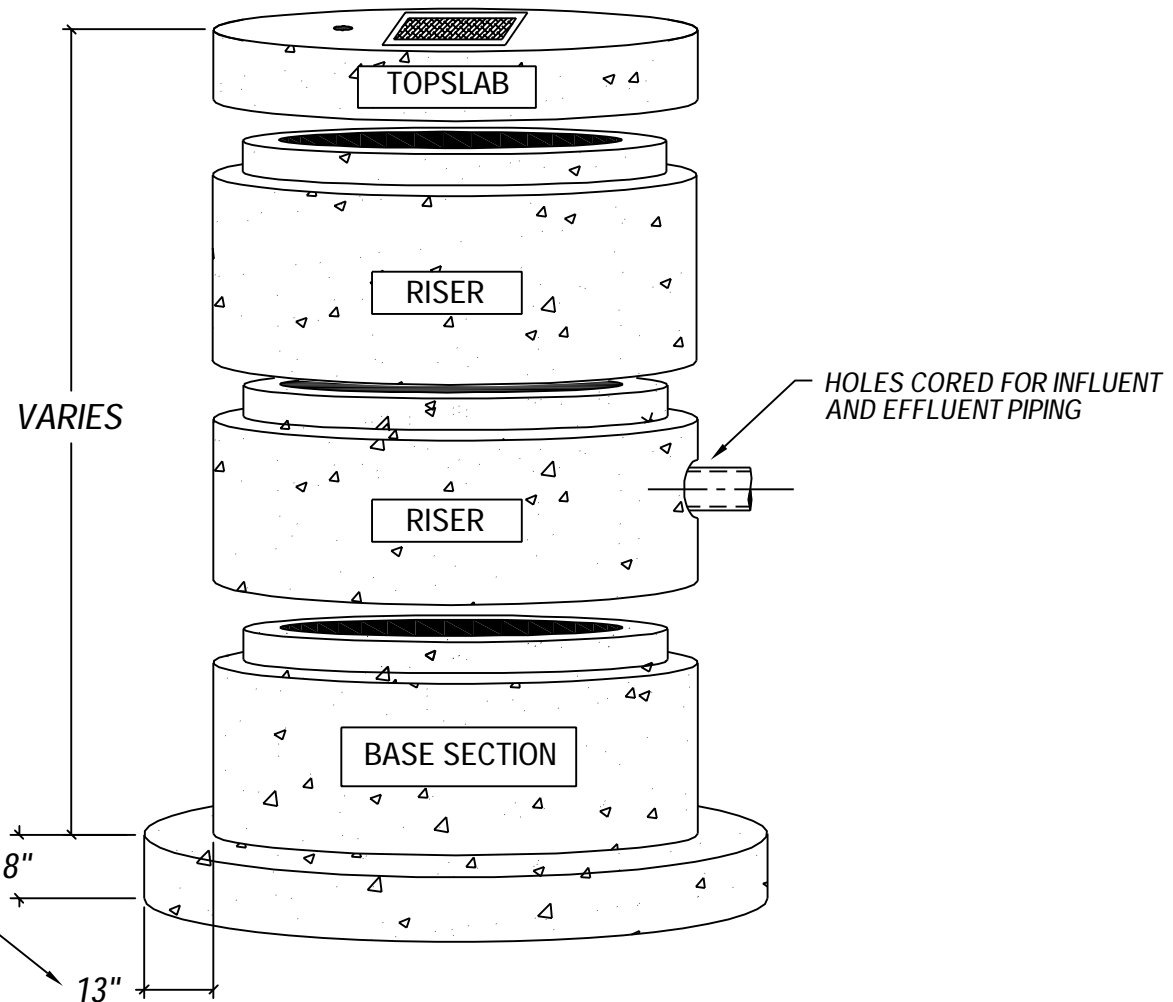

NOTE: BASESLAB THICKNESS
AND EXTENSIONS MAY VARY,
PER JOB SPECS.