



Quality Concrete Sanitary,  
Water & Drainage Products  
with Dependable Service





818 Central Avenue, Summerville, SC 29483, (843)873-3011



## CUSTOM BUILT DRAINAGE BOXES





TYPE-9 INLET




JUNCTION BOX

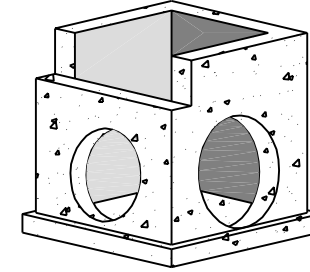



TYPE-16 & 17 CURB INLETS



RISER SECTIONS

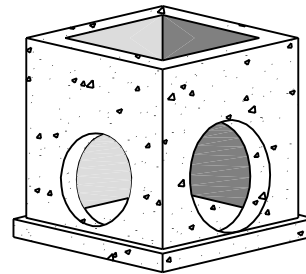

GRATE INLET / CATCH BASIN

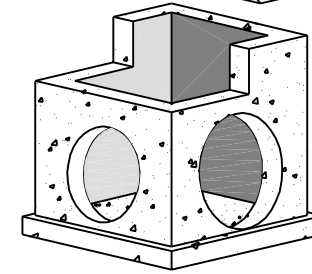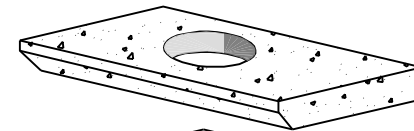

TYPE-18 CURB INLET

SPECIFICATIONS: (APPLICABLE FOR "STANDARD" SIZE STRUCTURES).

1. 4,000 PSI CONCRETE
2. WALL THICKNESS=6" REINF. W/#4 GRADE 60 REBAR @ 8"O.C.E.W.
3. BASESLAB THICKNESS=6" REINF. W/#4 GRADE 60 REBAR @ 8"O.C.E.W.
4. STANDARD BASESLAB EXTENSIONS = 3"
5. TOPSLAB THICKNESS=6" REINF. W/#4 GRADE 60 REBAR @ 6"O.C.E.W.
6. MANHOLE STEPS WHEN REQUIRED.
7. CUSTOM HOLES CAST-IN ACCOMODATING PIPES AND ANGLES.
8. DRAWING'S SCALE = N.T.S