

Quality Concrete Sanitary,
Water & Drainage Products
with Dependable Service




818 Central Avenue, Summerville, SC 29483, (843)873-3011

CUSTOM BUILT
VAULTS

SPECIFICATIONS:

1. 4,000 PSI CONCRETE
2. WALL THICKNESS THICKNESS VARIES WITH VAULT SIZE, (STANDARD= 6" THICK).
3. TOPSLAB THICKNESS VARIES WITH VAULT SIZE, (STANDARD= 6" THICK).
4. BASESLAB THICKNESS VARIES WITH VAULT SIZE, (STANDARD= 6" THICK).
5. STANDARD BASESLAB EXTENSIONS = 3"
6. REINFORCEMENT STEEL (GRADE-60), VARIES WITH VAULT SIZE, TO MEET SPECS.
7. CUSTOM HOLES CAST-IN TO ACCOMODATE PIPES.

CUSTOM SIZES AND DEPTHS PRODUCED
TO MEET YOUR DESIGN REQUIREMENTS

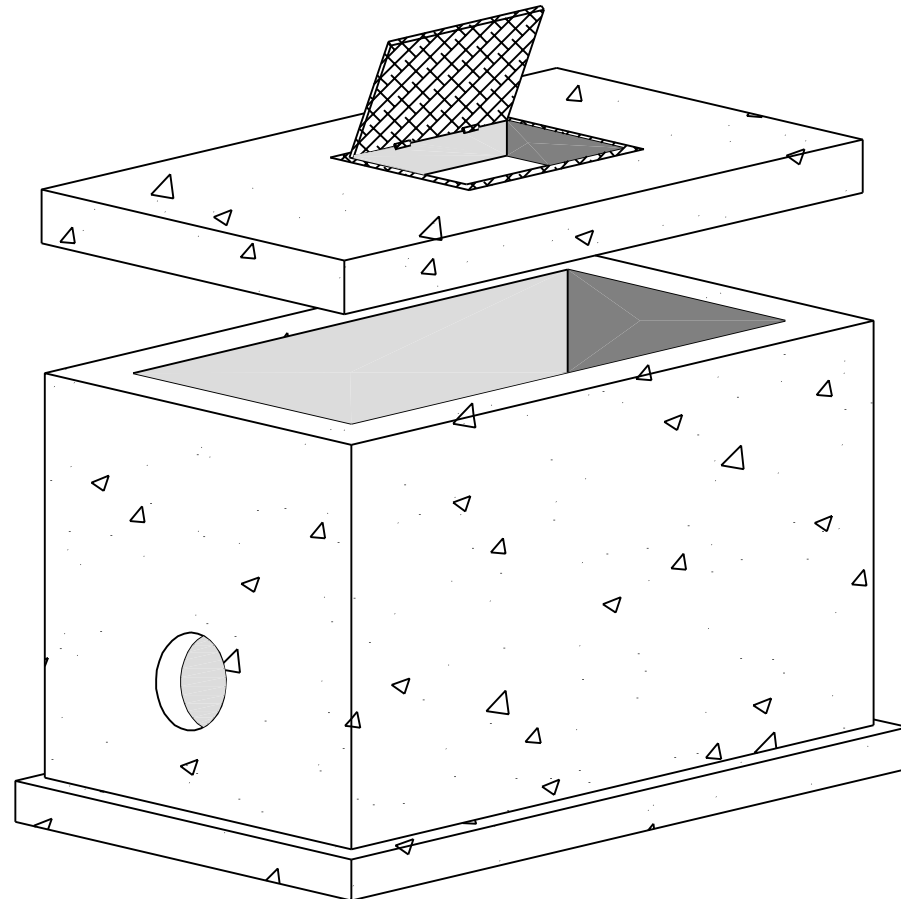

*VALVE VAULTS, METER VAULTS,
LIFT STATIONS, etc.*